


BATTERIES

LEAD ACID BATTERY INFORMATION

- ▶ COMPLETELY SEALED
- ▶ MAINTENANCE FREE
- ▶ ABSORBENT SEPARATOR USED TO IMMOBILIZE ELECTROLYTE (NON-GEL)
- ▶ LEAD CALCIUM GRID PROVIDES LONGER LIFE AND GREATER RELIABILITY
- ▶ QUICK DISCONNECT TERMINAL SIZE PREVENTS IMPROPER CONNECTION
- ▶ DUAL INNER SEAL AND OUTER COVER PROVIDES MAXIMUM LEAKAGE PROTECTION
- ▶ POSITIVE TERMINAL (.25") TAB & NEGATIVE TERMINAL TAB (.187") ON <50AH BATTERIES
- ▶ CAST LEAD TERMINALS ON 50AH BATTERY
- ▶ HIGH IMPACT SYNTHETIC RESIN (ABS)
- ▶ 6 MONTH SHELF LIFE
- ▶ 5-7 YEARS EXPECTED LIFE IN 60° - 80° F OPERATING RANGE (16° - 27° C)

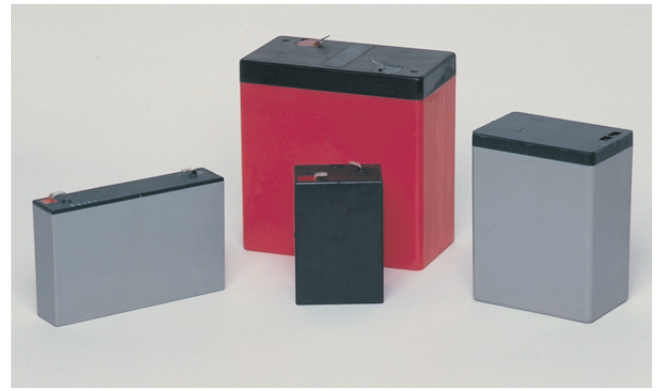

LEAD ACID BATTERY

UNIT INFORMATION

MODEL NUMBER	DC VOLTS	AMP * HOUR	WATTS PER HOUR						DIMENSIONS (IN.)			
			1.5	2	3	4	6	8	L	W	H	TERM
S65	6	4.6	12	9	6	~	~	~	2.8	1.9	4.0	0.2
S68	6	7.0	18	14	9	7	~	~	6.0	1.4	3.7	0.3
S610-SL	6	10.0	32	24	16	12	8	6	6.0	2.0	3.7	0.3
S636	6	36.0	100	75	50	38	25	18	7.2	3.0	6.6	~
S650	6	50	120	90	60	45	30	22	7.4	4.5	7.5	0.9
S1215	12	17.0	100	75	50	36	25	18	7.2	3.0	6.6	~
S1220	12	22.0	130	100	65	50	32	25	6.9	6.6	5.0	~

DISCHARGE TO 87.5% NOMINAL SYSTEM VOLTAGE AT 68°F AMBIENT TEMPERATURE
* 20 HOUR RATE

BATTERY DATA
MAY CHANGE
WITHOUT NOTICE

REFILLABLE LEAD ACID BATTERY INFORMATION

- ▶ PROVIDES GREATEST CAPACITY PER DOLLAR
- ▶ DRY CHARGED FOR EXTENDED SHELF LIFE
- ▶ NO CAPACITY LOSS IN STORAGE
- ▶ REFILLABLE FOR EXTENDED OPERATING LIFE
- ▶ LOW ANTIMONY, EXTRA THICK POSITIVE PLATES
- ▶ FLAME ARRESTOR VENT CAPS
- ▶ OPTIONAL HYDROCAPS MINIMIZE WATER LOSSES & EXTEND SERVICE INTERVALS
- ▶ SPECIFIC GRAVITY INDICATOR(S) PROVIDE CHARGE STATUS
- ▶ CAST LEAD TERMINALS WITH HARDWARE
- ▶ 5 YEAR SHELF LIFE
- ▶ 8-12 YEARS EXPECTED LIFE IN 32° - 105° F OPERATING RANGE (0° - 41° C)



REFILLABLE LEAD ACID BATTERY

UNIT INFORMATION

MODEL NUMBER	DC VOLTS	AMP * HOUR	WATTS PER HOUR						DIMENSIONS (IN.)			
			1.5	2	3	4	6	8	L	W	H	TERM
L640	6	40	120	90	60	45	30	28	9.2	5.4	7.0	1.0
L6100	6	100	360	240	180	120	90	60	9.5	7.3	8.9	1.1
L1260	12	64	240	180	120	90	60	45	10.3	6.7	9.7	1.1

BATTERY DATA
MAY CHANGE
WITHOUT NOTICE

SILTRON

PHONE 815-459-7142 • FAX 815-459-6126

THE POWER TO PROTECT

BATTERIES



SEALDE NICKEL CADMIUM BATTERY

SEALED NICKEL CADMIUM BATTERY INFORMATION

- ▶ COMPLETELY SEALED
- ▶ MAINTENANCE FREE
- ▶ ACTIVE PLATE MATERIALS: NICKEL OXIDE AND METALLIC CADMIUM
- ▶ CYLINDRICAL SHAPE IN FENCE CONSTRUCTION
- ▶ POSITIVE AND NEGATIVE LEAD WIRES WITH PLUG-IN CONNECTORS
- ▶ 5 YEAR SHELF LIFE
- ▶ 12 - 15 YEARS EXPECTED LIFE IN -4° - 158° F OPERATING RANGE (-20° - 70° C)

UNIT INFORMATION

MODEL NUMBER	DC VOLTS	AMP* HOUR	WATTS PER HOUR						DIMENSIONS (IN.)			BATTERY COMB.
			1.5	2	3	4	6	8	L	W	H	
N51F	4.8	1.3	4.8	3.8	2.4	~	~	~	3.8	0.9	1.8	(1)N51F
N64F	6	4	12	9	6	~	~	~	6.5	1.3	2.5	(1)N64F
N67F	6	7	25	18	14	9	~	~	6.3	1.3	3.6	(1)N67F
N71F	7.2	0.6	4	3	2	~	~	~	4.0	0.7	1.7	(1)N71F
N614	6	14	50	38	25	19	12	9	6.3	2.6	3.6	(2)N67F
N621	6	21	75	56	38	28	19	14	6.3	3.9	3.6	(3)N67F
N628	6	28	100	75	50	38	25	19	6.3	5.2	3.6	(4)N67F
N656	6	56	200	150	100	76	50	38	6.3	10.4	3.6	(8)N67F
N124	12	4	25	18	14	9	~	~	6.5	2.6	2.5	(2)N64F
N127	12	7	50	36	24	18	12	9	6.3	2.6	3.6	(2)N67F
N1214	12	14	100	75	50	38	25	19	6.3	5.2	3.6	(4)N67F
N1228	12	28	200	150	100	76	50	38	6.3	10.4	3.6	(8)N67F

BATTERY DATA
MAY CHANGE
WITHOUT NOTICE

DISCHARGE TO 87.5% NOMINAL SYSTEM VOLTAGE AT 68°F AMBIENT TEMPERATURE
* 20 HOUR RATE